

RA711



- **Vandal Resistant Stainless Steel Construction**
- **All Weather Protection**
- **Vandal Resistant**
- **LED indication for off-hook**
- **Auto Clear Down**
- **Simple installation**
- **Fast-fit terminal connection**
- **Raised Buttons in-line with DDA Directives**
- **Various Mounting Options**
- **Full Keypad, Single, Two or three button Auto-dial options**
- **Fully Programmable**
- **Non-volatile memory**
- **Line Powered**

RA711 Series Weather and Vandal Resistant Telephones

The Vandal Resist Telephones are based on a stainless steel faceplate and provide clear handsfree, loud-speaking operation. Manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times. The Vandal Resist Telephone has been designed to meet the needs of clients who experience loss through vandalism. However, the telephone is extremely simple to install and offers a convenient solution to a range of telephone siting problems in all locations.

The **RA711** is available with various keypad configurations; including Full Keypad, Single, two and three button Auto-dial options. The **RA711** is easy to program and has a non-volatile memory to ensure stored numbers are not lost when line power is disconnected. Additionally the entire range offers a timed or auto-clear down function, preventing an off-hook or 'hung' condition. Available for many applications the **RA711** is a versatile reliable product for security and emergency voice communications. Ideal for prisons, court-houses, rail platforms, car-parks, police stations, hospitals, outside buildings, gate entry etc.

DAC Limited Registered in England No.4851094
Registered Office: Unit214a, Lomeshaye Business Village, Turner Road, Nelson. UK. BB9 7DR
Tel: +44 (0) 1282 447000 Fax: +44 (0) 845 280 1915

www.daclimited.co.uk

TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION

Speech/ Network interface:

Voice switched (VOX) semi duplex operation.
EN 301 437 V1.1.1 (manufactured to TBR21/
TBR38)

Ringing:

Through internal speaker, REN1. 3 selectable tones.

Power Supply:

Line powered down to 15mA. Optional special model, with 9V power supply to give increased volume.

Call cleardown:

Adjustable timer from 1 to 10 minutes. Auto cleardown function on tone detection from the line.

Temperature:

Operating -30 C to +65 C
Storing -40 C to +80 C

Relative Humidity:

Up to 95% Non condensing

Keypad:

Heavy duty metal keypad and buttons, Vandal resistant

Material:

Robust high grade Stainless Steel

Programming:

Using on board keypad and externally connected security keypad

Weight:

1.8KG



Safety:

Manufactured to BS EN 60950
Low Voltage directive 73/23/EEC modified by Directive 93/68/EEC CE Marking
EMC Directive - 89/336/EEC amended by Directive 91/263/EEC, Directive 92/31/EEC and Directive 93/68/EEC
ETSI ES 203 021-V2.1.2
ITU-T K21 (Resistibility of telecommunications equipment installed at customers premises to over-voltages and over-current)
NR/E/S30003 The performance of telecommunications equipment under conditions of electrical interference
EN50121-4:2000 Railway applications - Electromagnetic compatibility

Protection:

Dust and liquids to IP55 dependant on installation

DIMENSIONS

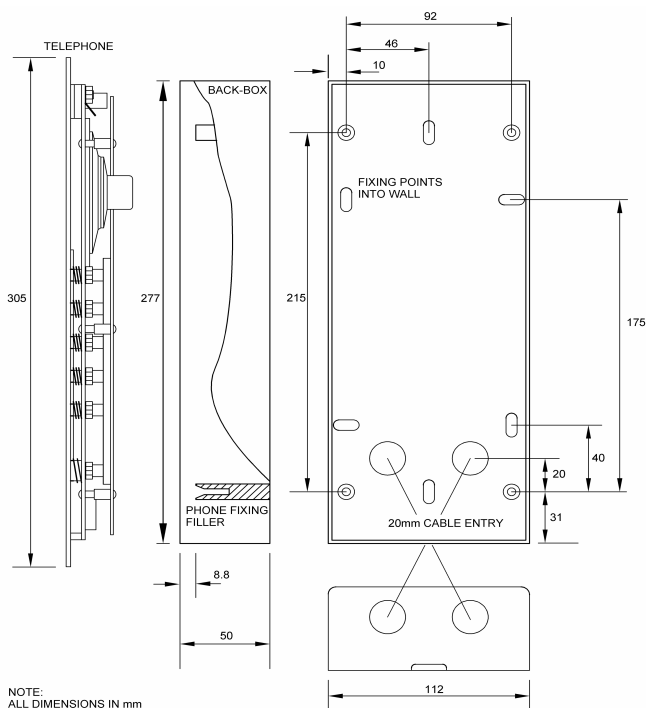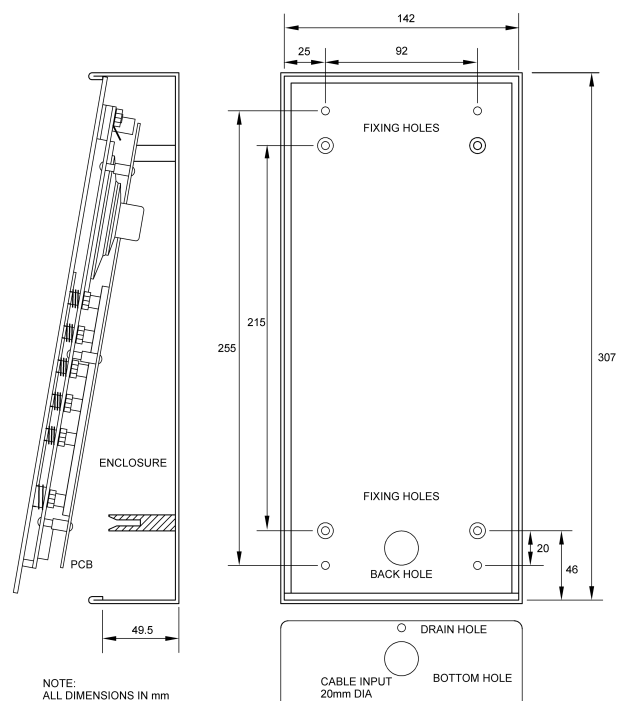

www.daclimited.co.uk

DAC Limited
Tel: +44 (0) 1282 447000
Fax: +44 (0) 8452801915