

Full High Definition video
communications -- Now more
accessible than ever



Feature-rich, Full HD Video is Here

Extending the capabilities of the award-winning LifeSize® Express™ system, LifeSize® Express 220™ is an enhanced Full HD video communications system that is both affordable and scalable. Ideal for small working groups, teams or individual knowledge workers who want to take communication over distance to the next level, LifeSize Express 220 has it all.

With LifeSize Express 220, you not only get Full HD video quality - 1080p30/720p60 - for natural, realistic interactions at the lowest possible bandwidth, but also crisp, crystal clear data-sharing and an all new digital I/O with Full HD support. Support for dual high definition displays, Full HD camera, and phone or microphone options, LifeSize Express 220 offers the ultimate flexibility.

Express 220 brings people together by allowing them to interact successfully across distances. Seeing facial expressions, body language and gestures makes you feel truly connected and understood.

And just like all of the products in the LifeSize 220 Series, LifeSize Express 220 features:

- Highest available resolution on the market – 1080p30
- Unprecedented bandwidth/performance
- Adaptive Motion Control with Forward Error Correction
- Streaming and Recording of point-to-point calls

High definition quality. Simplicity. Meaningful team connections. LifeSize Express 220 is clearly how video communications is meant to be.

LifeSize Express 220 Key Features

Video
Quality

Full High Definition
Standards-based
1920x1080 - 30fps
1280x720 - 60fps

Multiple HD
Monitors



HD Camera



HD Audio



External
Audio & Video
Input/Output

Audio: 5 in, 4 out
Video: 2 in, 2 out

Point-to-Point
HD Video
Communications



Product Specifications - LifeSize® Express 220™

System Components

LifeSize codec
High Definition PTZ LifeSize Camera 200
LifeSize MicPod or LifeSize Phone
Wireless remote control
Power Supply
Cables

Communications

H.323, SIP
128Kbps - 4.0Mbps
1xRJ-45 Network LAN
1x3.5mm Mic In for LifeSize MicPod
1 x RJ-45 for LifeSize Phone or LifeSize Networker (optional)

Support for Multiple Displays

Any high definition displays supporting HDMI or DVI-I input
For additional information on displays, visit:
www.lifesize.com/support

High Definition 1080p30/720p60 PTZ Camera

Wide-angle zoom lens with 70 degree field of view
4xOptical zoom
Auto focus / Automatic gain control
10 camera presets (near or far end)
Standard 3.0 M HDMI cable

Video Specifications / Video Resolutions

Maximum resolutions widescreen 16:9 aspect ratio
All resolutions progressive scanning
All resolutions at 30 frames per second except 60 frames per second where noted
384Kbps (912x512pixels) DVD resolution
512Kbps (1024x576pixels)
768Kbps (1280x720pixels) High Definition
1.1Mbps (1280x720pixels @p60) High Definition
1.7Mbps or higher (1920x1080pixels) High Definition

Video Standards

H.261, H.263, H.263+, H.264 and H.239 compliant
Support for multiple dual live streaming modes:
1080p30 and 720p5
720p60 and 720p5
720p30 and 720p30

Video Formats

High Definition, 16:9 aspect ratio

Video Inputs (2 Inputs)

1 x HD Video In (1080p30/720p60)
1 x DVI-I In (HDMI/VGA enabled)

Video Outputs (2 Outputs)

2 x HD Digital Video Out (1080p30/720p60)

High Definition Audio

Single omni-directional LifeSize MicPod
100Hz up to 16 kHz
Mute button (Micpod only)
Powered by codec directly through cable

Audio Features

High Definition audio
GIPS NetEQ packet loss concealment
Full duplex for natural conversations
Echo cancellation for echo-free calls
Automatic gain control
Automatic noise reduction
Three-way audio add-on call capability
MicPod or Dual MicPod support (optional)

Audio Standards

G.711, G.722, G.722.1 (Polycom® Siren14™), G.728, G.729, MPEG-4 -AAC-LC

Audio Inputs (5 Inputs)

1 x Line In (L+R) (3.5mm)
1 x Mic In - Two channel (3.5mm)
1 x RJ-45 (LifeSize Phone) (Optional)
1 x HD Video In
1 x DVI-I In

Audio Outputs (4 Outputs)

1 x Line Out / Headset (L+R)
1 x RJ-45 (LifeSize Phone) (Optional)
2 x HD Video Out

Other Supported Standards

H.221, H.224, H.225, H.231, H.241, H.242, H.245, H.281, BONDING (ISO13871) via LifeSize Networker, RFC 3261, RFC 3264, RFC 2190, RFC 3407, RFC 2833

User Interface & Features

Context sensitive user interface
Graphical User Interface Call Manager
Multiple languages supported
Do Not Disturb mode

Stream/Recording

Record/Stream outside of a call
Record/Stream point-to-point or multipoint calls
Capture all call participants
Single button, ad-hoc recording
Recording indicator

Security

Admin and User-level password
SNMP security alerts
Ability to disable HTTP, SSH and Telnet services
H.235 (AES) encryption support including strict compliance
TLS/SRTP support
IEEE 802.1x support
Kensington Security Slot

Intelligent Networking Features

Adaptive Motion Control (AMC) including Forward Error Correction (FEC)
NAT/Firewall Traversal (H.460/SIP)
IPv4 and IPv6 support
Auto bandwidth detection
ISDN support via LifeSize Networker

Directory and Address Book

Up to 1000 local directory entries
Save, Lock, Remove Redial List features
Missed call notification
Auto-Discovery directory lookup (patent pending)
LDAP support / H.350 compliant
Meetings Directory support

System Management

Out of box setup via web interface and management tool
SNMP
Backup and Restore capability
JPEG snapshots through web interface

Power

AC Voltage 100-240V, 50-60 Hz, 2.5A via external power supply

Environmental Data

Operating temperature: 0 C (32 F) to 40 C (104 F)
Operating Humidity: 15% to 85%, non-condensing
Storage temperature: -20 C (-4 F) to 60 C (140 F)
Storage humidity: 10% to 90%, non-condensing

Codec Dimensions


Width: 288mm (11.34")
Depth: 187.5mm (7.38")
Height: 41.3mm (1.63")
Weight: 1.29Kg (2.84 lbs)

Regulatory Model Number

LifeSize Express 220 = LFZ-018

For additional information: www.lifesize.com/support

Information contained in this document is preliminary and subject to change without notice. LifeSize is a registered trademark or trademark of LifeSize Communications in the U.S. and other countries. © Copyright 2009. All rights reserved. October 2009.

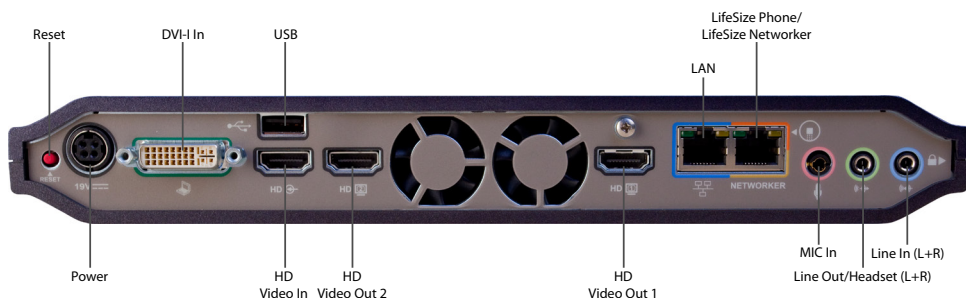

LifeSize Communications:
901 S. Mopac Expressway
Building 3, Suite 300
Austin, Texas 78746 USA

Phone: +1 512 347 9300
Fax: +1 512 347 9301
Email: info@lifesize.com
www.lifesize.com

EMEA:
LifeSize Communications
Toll-Free Europe
008000 999 09 799

APAC:
LifeSize Communications
Hong Kong
Phone: +852 3189 7061