

T-17SXLG Specifications

HITACHI
Inspire the Next

Hardware Specifications

Panel

| | |
|------------------------|-------------------------------|
| Model No. | T-17SXL |
| Screen | TFT Active Matrix LCD display |
| Input Methods | Electromagnetic induction |
| Interface to Computer | USB 1.1 |
| Effective Screen Size | 17 inches |
| Screen Resolution | 1280 x 1024 (SXGA) |
| Standard Colors | 16,700,000 colors |
| Brightness | 300 cd/m ² |
| Contrast Ratio | 1000:1 |
| Tracking Speed | 125 points/s |
| Coordinate Resolution | 500 lpi |
| Accuracy | Approx. ±0.5 mm |
| Dimensions (w/o stand) | 15.6"(W) x 14.8"(H) x 2.2"(D) |
| Weight | 11.5 lbs. |

Pen

| | |
|--------------|-------------------|
| Battery | AAA battery x 1 |
| Battery Life | Approx. 1,800 hrs |
| Proximity | 0.3" |



Others

| | |
|---------------------------|---|
| Operating Specification | 50 - 95 °F (10 - 35 °C) 30 - 80 % humidity |
| Viewing Angles | Right/Left: 85°, Up/Down: 80° |
| Safety Standard Approvals | FCC-B, UL/cUL, CE, VCCI-B, TUV, RoHS |
| Packing Dimension | 19.1"(W) x 19.1"(H) x 8.9"(D) |
| Packing Weight | 18.1 lbs. |
| Warranty | 2 year warranty |

Standard Features

- 5:4 Display Aspect Ratio
- 8 Function buttons (software shortcuts)
- Wireless electronic pen, 2 customizable buttons
- Adjustable tilt stand, range of 12° to 75°
- VESA DPMS power saving
- VESA Flat Panel Monitor Physical Mounting Interface (100 x 100mm)
- 512 gradations of pressure sensing (n/a with StarBoard Software)
- StarBoard Software Suite, pen pad driver included

System Requirements

PC Requirements

| | |
|---------------------|--|
| CPU | Intel Pentium 4 1.8GHz or higher |
| RAM | 1 GB or more is recommended |
| HDD | 600 MB of free space |
| Display Color Depth | 16 bit or more |
| Software Required | I.E. 6.0 or higher / DirectX 9.0c / MS Office 2002 or higher, Windows Media Player 9.0 or higher, Adobe Acrobat 5.05 or higher for importing documents |
| Hardware Required | DVD-ROM |
| OS | MS Windows 2000/XP(32 bit)/Vista/7(32/64 bit), latest service pack must be applied (Tablet PC and Server Edition are currently not supported) |
| Other | Video card w/ hardware overlay for video function |

Mac Requirements

| | |
|---------------------|---|
| CPU | Intel® processor |
| RAM | 1 GB or more is recommended |
| HDD | 600 MB of free space |
| Display Color Depth | 16 bit or more |
| Software Required | MS Office 2004 or higher for importing documents / Quick Time 7.1 or higher |
| Hardware Required | DVD-ROM |
| OS | Mac OS X 10.4, 10.5, 10.6 latest service pack must be applied (Mac OS X 10.6 Snow Leopard is now supported) |
| Other | Built-in display or display connected to Apple supplied video card supported by your Mac |

All specifications are subject to change without notice. Printed 08.10

StarBoard® is a registered trademark of Hitachi Software Engineering Co., Ltd. in the U.S.A. and other countries.

StarBoard

Hitachi Software Engineering America, Ltd.
900 Hitachi Way Chula Vista, CA 91914 | starboard@hitachi-soft.com
1-800-HITACHI | www.hitachi-soft.com/starboard


HITACHI
Inspire the Next

T-17SXLG Specifications


HITACHI
Inspire the Next

Dimensions


Top View

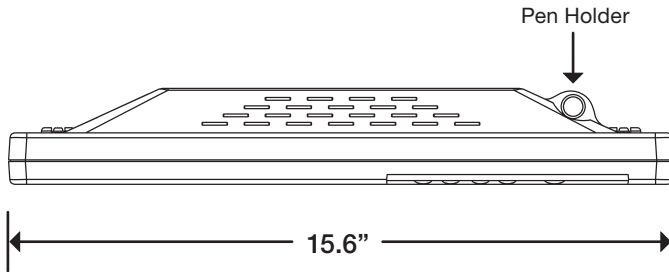


Front View

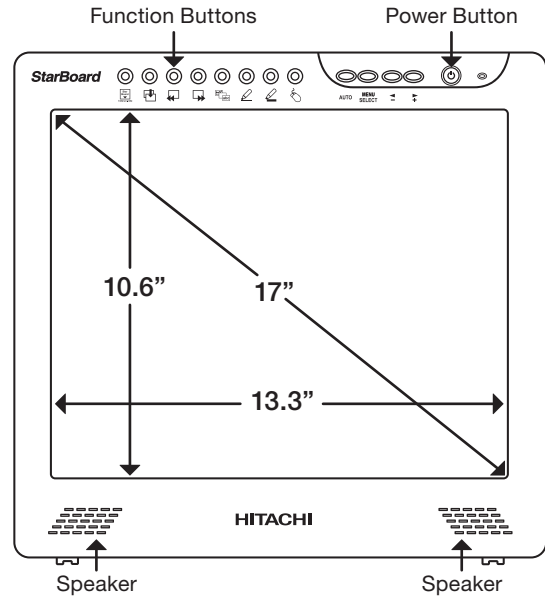

Back View

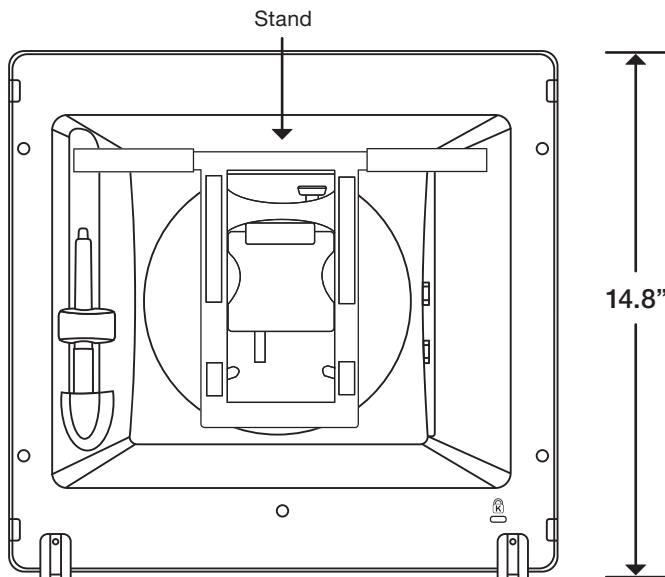

Side View

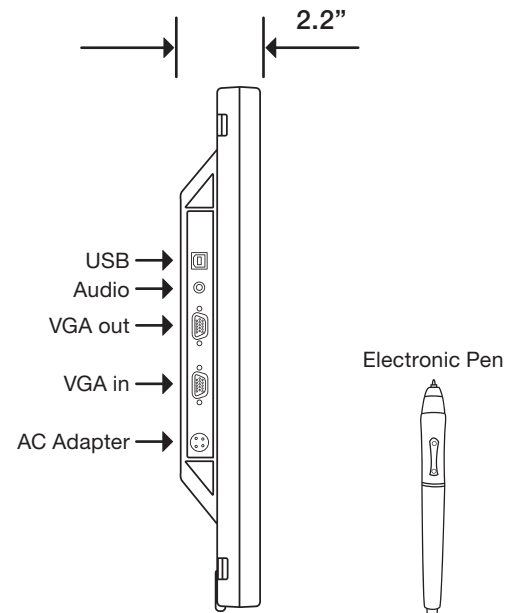

All specifications are subject to change without notice. Printed 08.10

StarBoard® is a registered trademark of Hitachi Software Engineering Co., Ltd. in the U.S.A. and other countries.

StarBoard

Hitachi Software Engineering America, Ltd.
900 Hitachi Way Chula Vista, CA 91914 | starboard@hitachi-soft.com
1-800-HITACHI | www.hitachi-soft.com/starboard

HITACHI
Inspire the Next